


## Gf-HUEP SPEED - Connection box for multi residential units

---

- 12x splice tray
- 1x holder PLC-splitter
- 6x couplings in fold-out tray (12x LC)
- 3x flexible, divisible sealing sets for 2-Ø 10 mm
- Optional Gabocom sealing set with pipe retainer
- Strain relief
- Snapping and removable cover
- Sealable, lockable
- IP 54, UV, UL
- 150 x 212 x 53 mm

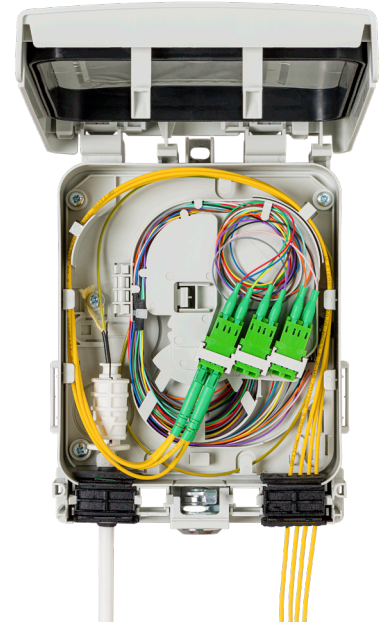

---

### Overview

With its innovative fiber management and sealing concept, the fiber termination box Gf-HUEP SPEED offers a maximum of application options. The installation effort has been significantly reduced. The thought out solution provides a long service life and maximum investment protection.

The building transfer point Gf-HUEP SPEED provides the 3-point wall mounting. The screws are included to the Gf-HUEP and they are covered after the installation.

The cover opens upwards and snaps for the mounting of fibers in the open position. It can easily be removed and inserted again. Inside the cover there is a document case as well as a seal. The Gf-HUEP can be protected against unauthorized access with 2 sealing wires or with a lock applied in the middle, or on the right fiber inlet.

In the lower area 3 fiber-ports are implemented, which are closed in delivery condition and can be loaded with the needed seal sets (grommets). The following seal sets are attached to Gf-HUEP SPEED:  
1x Ø 10 mm, 2x Ø 7 mm, 1x 2 x Ø 7 mm, 1x 12 x Ø 5 mm, 1x 24 x up to Ø 3 mm.

Each sealing set suits to each port. The sealings are pre-perforated, therefore a quick insertion of pipe / cable / patchcords is provided.

At the input and output strain reliefs for mounting the cables are installed. In the left input a place for a gas-stop is provided.

The lower fiber management (bottom plate) offers enough place to store excess lengths of fiber. Also a clip-mounting for a PLC splitter is provided. A crimp-splice-holder for 12 splices is enclosed to the Gf-HUEP SPEED and can be mounted in the lower fiber management.

In the upper, mobile and removable fold-out-tray there can be placed up to 6 SC/E2000 or LC-duplex-couplings. Therefore up to 12 fibers (LC) can be fed out through connectors. Alternatively, the Gf-HUEP SPEED can be used as a pure splice distribution box.

Optional Gabocom speed. Pipe-sealing sets can be used for speed-pipes of Ø 5-Ø 12 mm, which can be pushed directly into the sealing and will be automatically strain relieved.

# Gf-HUEP SPEED - Connection box for multi residential units

---

## Order information

Item code	Legacy code	Description
19013006	Gf-HUeP Speed	Fiber termination and distribution box
19013210	Gf-HUeP Speed	Fiber termination and distribution box with lock